



# HOT TUB JUMBO

## USER MANUAL

**AQUASPA**  
FROM ORDINARY TO EXTRAORDINARY



# HOT TUB JUMBO

## TABLE OF CONTENTS

- Introduction ..... 3
- General Information ..... 4
- Safety Instructions ..... 5
- Features & Technical Specifications ..... 6
- Components ..... 7
- AQUASMART System (Optional) ..... 8
- Ozone and UV Sanitization (Optional) ..... 9
- Audio System (Optional) ..... 10
- Directional Jets and Lumbar Mini Jets ..... 11
- Magnetotherapy (Optional) ..... 12
- Chromotherapy (Optional) ..... 13
- Diverter Valves ..... 14
- Decorative Water Fountains ..... 15
- Suction Intake ..... 16
- Thermal Cover ..... 17
- Filling and Water Level ..... 18
- Acrylic and Cabinet Colors ..... 19
- Service and Technical Support ..... 20
- Dimensions & Capacity ..... 21
- Pre-Installation Inspection ..... 24
- Electrical Safety Installation ..... 25
- Electrical Power Supply & Installation ..... 26
- Metal Frame Structure ..... 27
- Factory Notes ..... 28
- Contact Information ..... 29



# SPA JUMBO

## INTRODUCTION

### CONGRATULATIONS!

You have acquired a high-quality **Aquaspa Hot Tub**. Prepare to experience the comfort, wellness, and advanced hydrotherapy that your spa has been engineered to deliver.

This user manual contains all necessary information for:

- Correct operation
- Safe installation
- Proper maintenance

Please read this manual carefully **before unpacking, installing, or operating the unit**. Following all instructions step-by-step is essential. **AQUASPA assumes no responsibility for damages or malfunctions caused by improper installation, unauthorized modifications, or incorrect handling.**



#### IMPORTANT:

During transportation or unpacking, handle the spa carefully. The equipment contains delicate systems and components that require protection from impacts, mishandling, or improper lifting.



# SPA JUMBO

## GENERAL INFORMATION

### GENERAL INFORMATION


The **AQUASPA Spa** has been designed to provide an outstanding hydrotherapy experience, relaxation, and well-being. Whether installed at home, in a hotel, resort, spa center, or fitness club, this system offers:

- **Cutting-edge design**
- **Superior functionality**
- **Exceptional performance**
- **Durable construction**
- **Enhanced user wellness**

At **AQUASPA**, we continually innovate and optimize every manufacturing process to deliver **high-performance, energy-efficient, and reliable hydrotherapy systems** that support both physical and emotional well-being.

### THE DIFFERENCE IS IN THE PERFORMANCE

“I have  
**SIMPLE** tastes...  
I’m satisfied  
with the **BEST**”

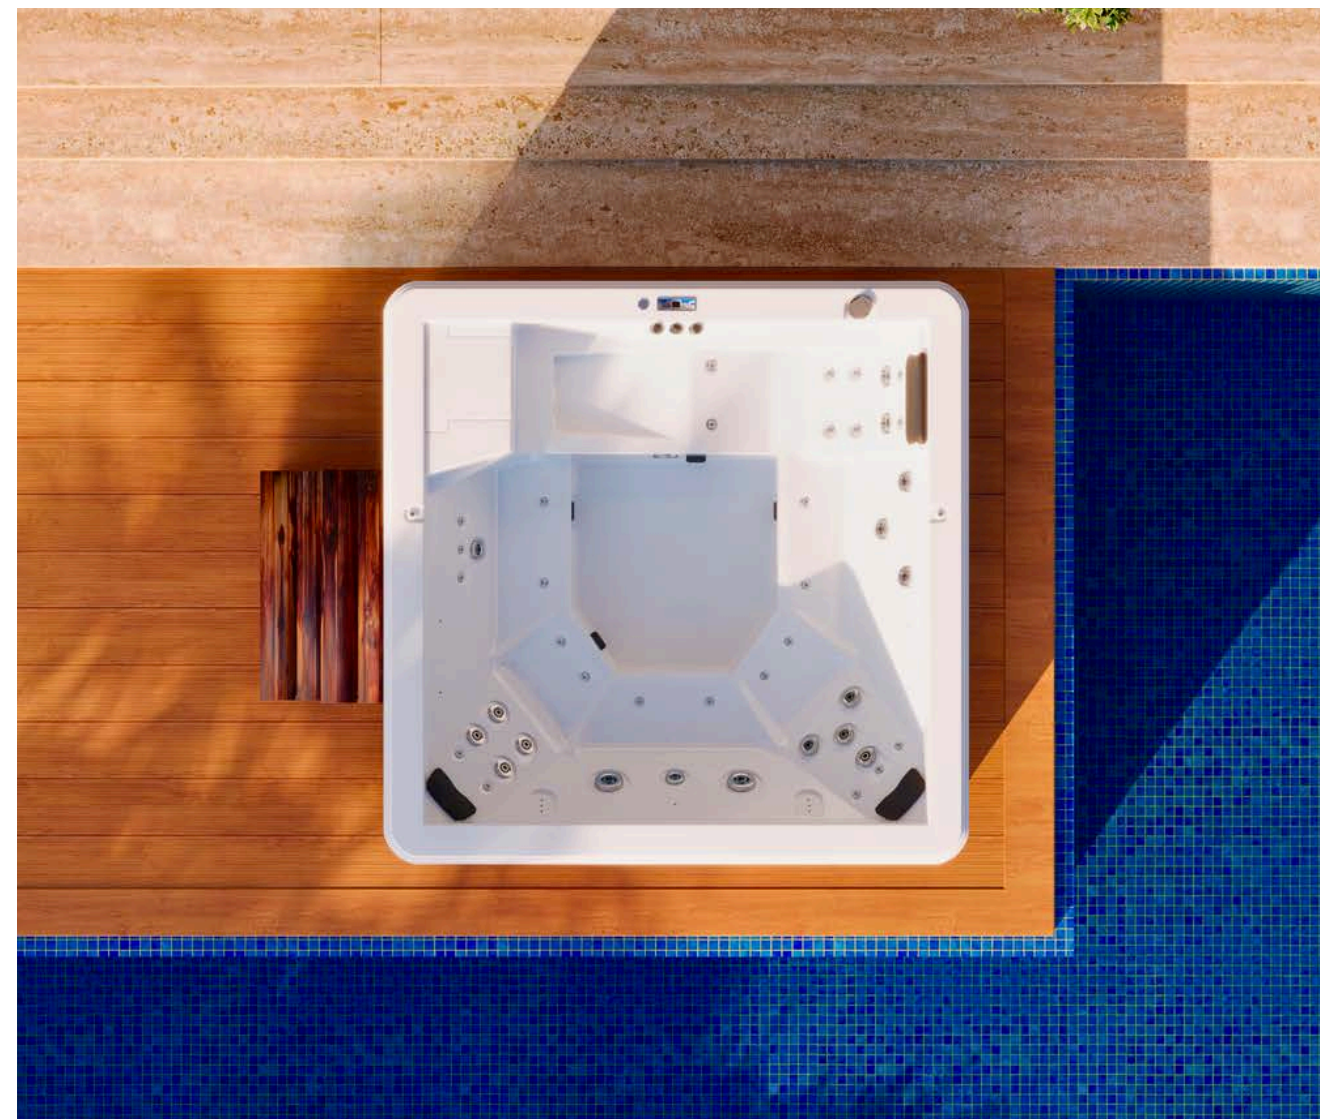

### SAFETY INSTRUCTIONS

Before operating your hot tub, carefully read and follow all safety instructions included in this manual.

- **Maximum water temperature must not exceed 40°C (104°F)** due to the acrylic material properties.
- For outdoor installations, the spa must be protected under a **canopy or weatherproof structure** to avoid direct sun exposure.
- Installation must comply strictly with all technical specifications described in this manual.
- **Improper installation may result in serious personal injury, equipment damage, or property damage.**
- **Children must not operate the spa without continuous adult supervision.**

- Individuals with medical conditions (**cardiovascular disease, hypertension, pregnancy, or other health conditions**) must consult a physician before using the spa.
- Use the hot tub only for its intended purpose. **Do not install unauthorized or aftermarket accessories.**



**CAUTION:** Keep hair, body parts, and foreign objects away from suction intakes. Wearing a **bathing cap** is strongly recommended for additional safety during operation.



**WARNING:** The use of **non-approved chemicals, excessive chemical concentrations, or improper cleaning agents** may cause permanent damage to the equipment and void the product warranty.



# SPA JUMBO

## FEATURES & TECHNICAL SPECIFICATIONS

### SPECIFICATIONS

#### CONSTRUCTION AND MATERIALS

- Export-quality acrylic
- 4 layers of fiberglass
- Polyurethane thermal insulation
- Teak-style wood cabinet
- 3 headrests with synthetic leather finish
- Dura Therm thermal cover

#### HYDRAULIC SYSTEM AND PUMPS

- 1.5 HP dual-speed motor (220 V)
- 4 HP dual-speed motor (220 V)
- 2.5 HP motor (110 V)
- 5,500-watt electric heater (220 V)
- 2 suction intakes
- Skimmer filter
- Fill jet

#### JETS AND HYDROMASSAGE THERAPY

- 2 directional jets (5")
- 15 directional jets (3")
- 28 lumbar mini jets

#### CONTROLS AND FUNCTIONALITY

- Electronic control panel
- Temperature sensor

#### LIGHTING AND WELLNESS

- LED lighting system
- Chromotherapy system

#### WATER FEATURES AND EXTERIOR DESIGN

- Decorative water fountains

#### ADDITIONAL FEATURES

- Synthetic leather headrests
- Dura Therm thermal cover

**7 Adults +2 Children**  
2,197 L. / 580.3 gal.



**Spa Depth:**  
0.88 m. / 34.64 in.

**Dry Weight:**  
650 Kg. / 1,433 lb.

**Total Height:**  
0.98 m. / 38.58 in.

**Total Filled Weight:**  
3,487 Kg. / 7,687.52 lb.



5 Available  
Light Colors

### OPTIONAL FEATURES


(Available at additional cost)

- Synthetic wood cabinet
- Teak or synthetic wood steps
- Ozone and UV sanitization system
- Audio system
- Magnetotherapy system
- Reinforced metal structure
- Stainless steel handrail
- AQUASMART system (smartphone control)



# SPA JUMBO

## COMPONENTS

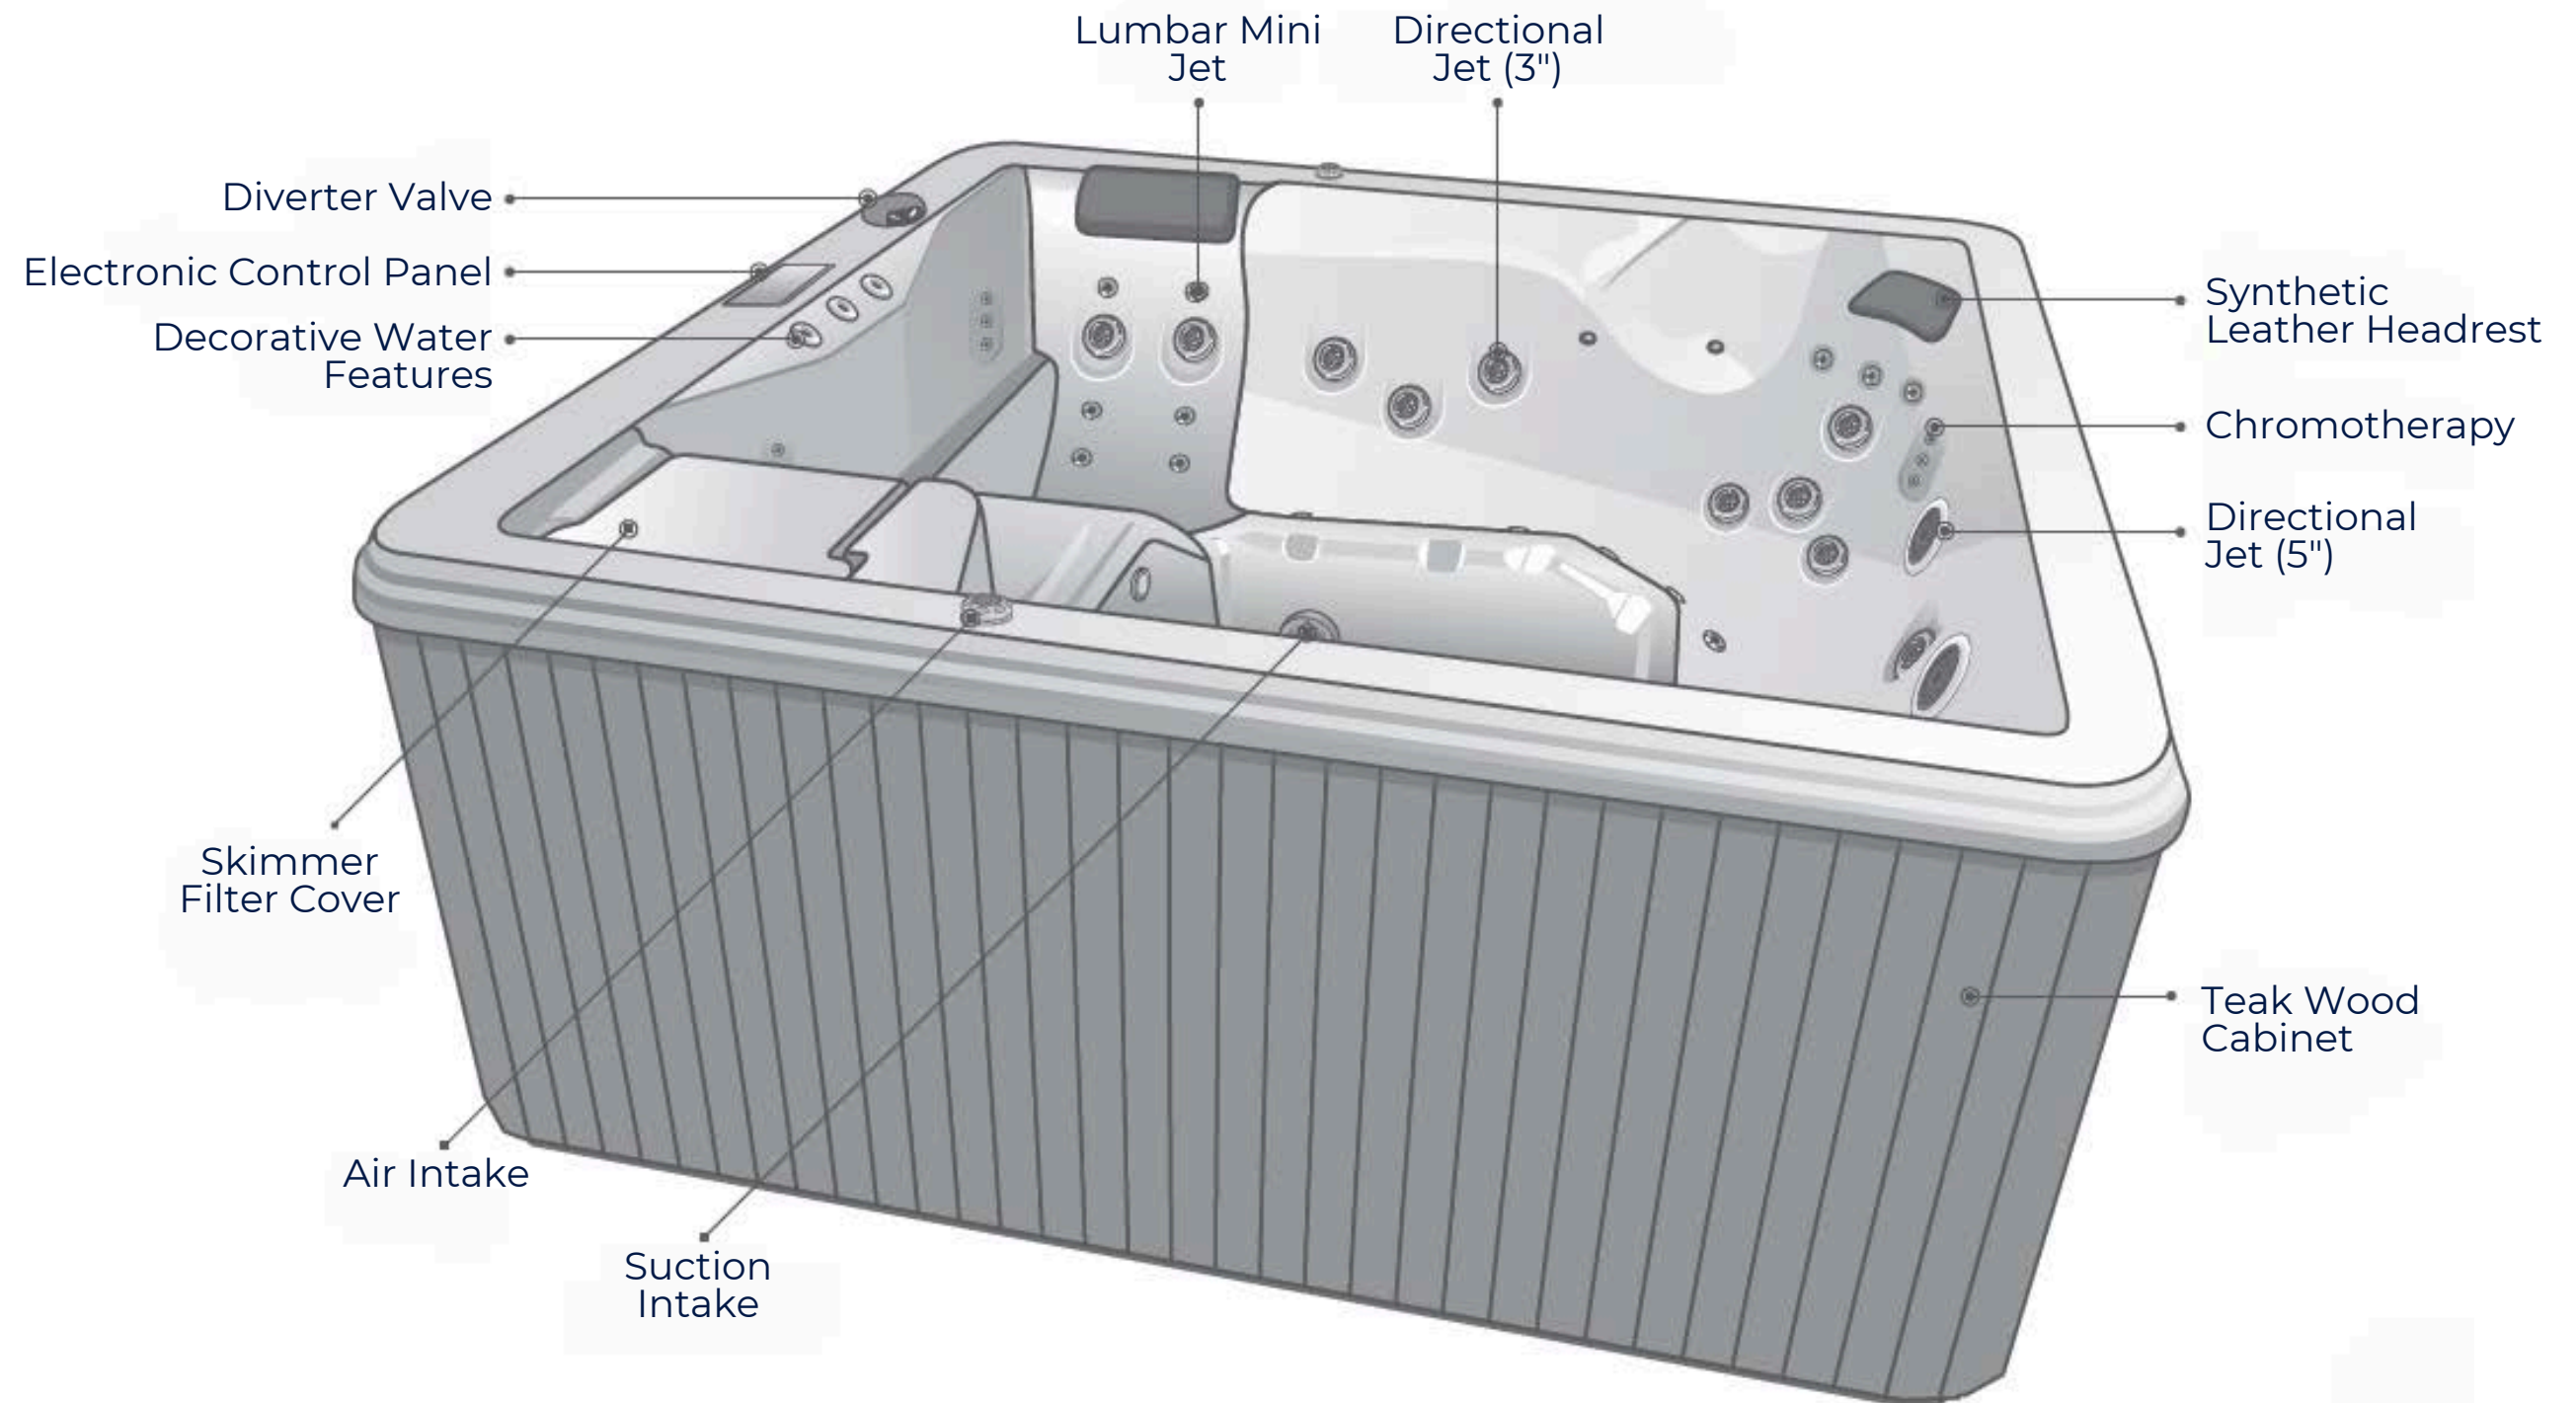

# SPA HEAVEN

## AQUASMART SYSTEM (Optional)

### TOTAL CONTROL FROM YOUR SMARTPHONE

The optional **AQUASMART system** allows you to remotely control all spa functions directly from your smartphone or tablet:

#### KEY FEATURES:

- Adjust water temperature in real-time.
- Turn jets, lighting, and fountains on/off.
- Activate energy-saving mode.
- Receive automatic maintenance alerts.
- Program filtration and operation schedules.
- Monitor spa system remotely from anywhere.

#### SETUP PROCESS:

- **Download the free app.**

Search for “Gecko” or “in.touch 2” in App Store or Google Play.



- **Connect to your home Wi-Fi.**(the spa and device must be on the same network during initial setup).
- **Create your user account** and follow the app instructions to pair your spa.

**Note:** The AQUASMART system is only available for models equipped with this option.



### SANITIZATION

The optional ozone and ultraviolet (UV) sanitization system reduces the need for harsh chemicals, minimizing skin and eye irritation.

#### OZONE SYSTEM

- Ozone is a powerful natural oxidizer that eliminates bacteria and microorganisms.
- The ozone molecule has a short lifespan; **conventional sanitizers should still be used, but in lower quantities and frequency.**

#### UV SANITIZATION

- UV disinfection is a non-chemical process using **high-intensity ultraviolet light** to deactivate bacteria, algae, and viruses by disrupting their DNA/RNA.



The ozone and UV system operates **continuously while the spa's circulation pump is running.**

# SPA JUMBO

## AUDIO SYSTEM (Optional)

### AUDIO SYSTEM


The integrated audio system enhances your relaxation sessions with high-fidelity sound.

#### SYSTEM FEATURES:

- Bluetooth connectivity
- Auxiliary input ports
- Full Compatible with mobile devices

#### INCLUDED COMPONENTS:

- Stereo receiver
- 4 cabinet-mounted speakers
- Subwoofer
- Amplifier

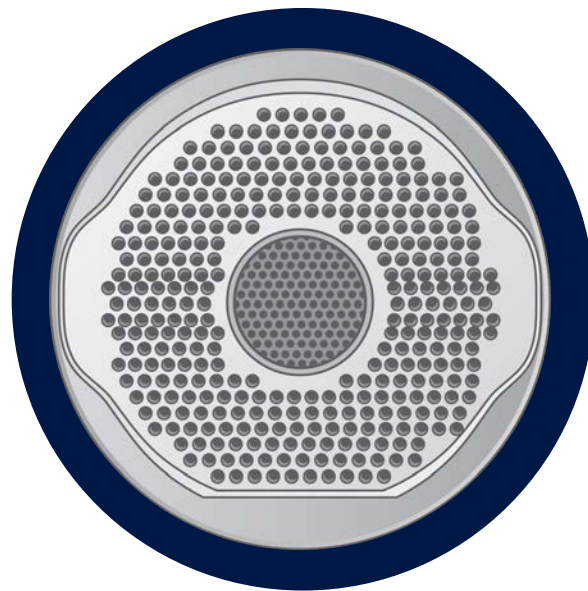

**Note:** The design, configuration, or brand of audio components may vary depending on availability.






### DIRECTIONAL JETS (5" AND 3")


The certified **AQUASPA directional jets** allow personalized massage adjustments for each body zone.

- Each jet is manually adjustable for precise flow direction.
- Rotating jets provide a **focused, pulsating massage** ideal for the back and shoulders.

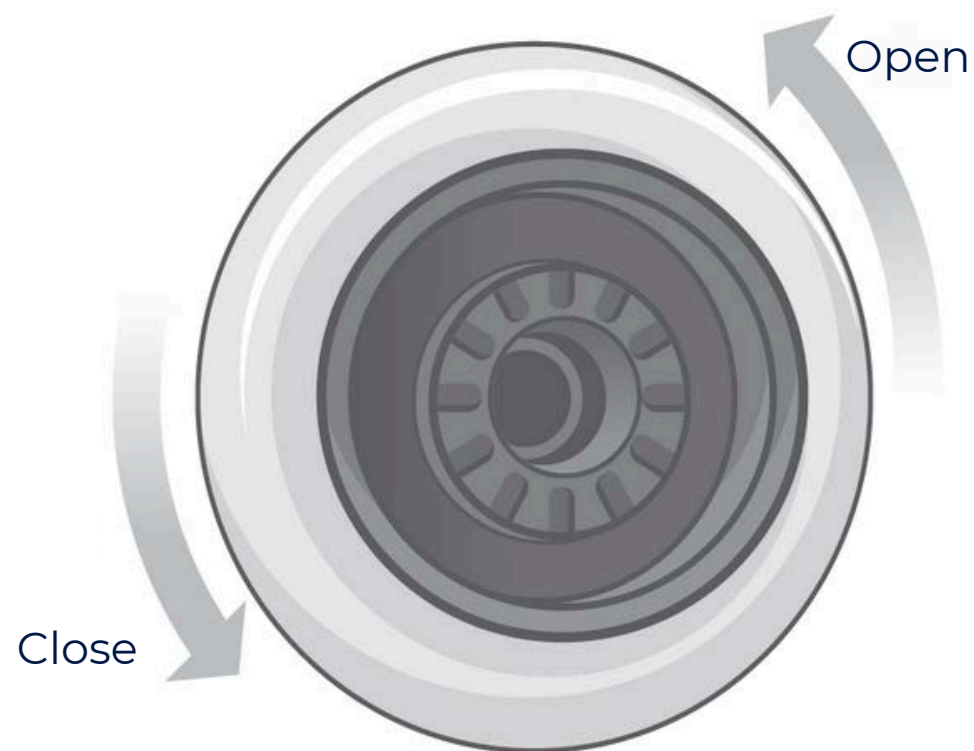

### LUMBAR MINI JETS

- Strategically positioned at the lower backrest.
- Deliver localized massage for **lumbar relief and deep muscle relaxation**.

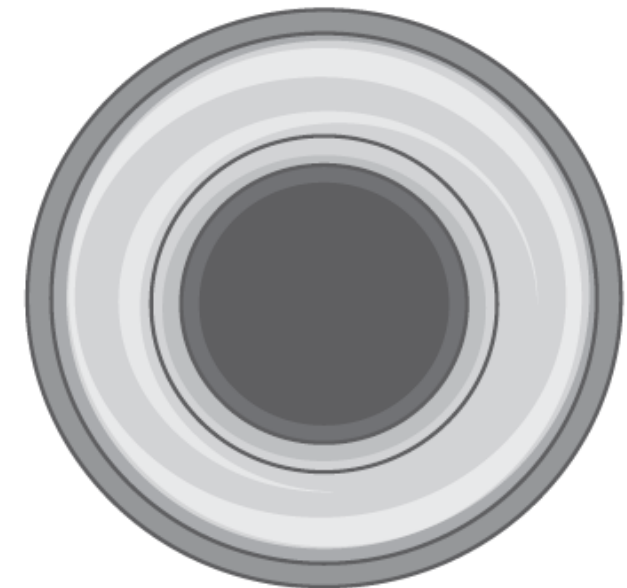

## MAGNETOTHERAPY

Magnetotherapy utilizes **low-frequency magnetic fields** to support relief of:


- Chronic pain
- Inflammation
- Muscular discomfort

### **BENEFITS:**

- Improves blood circulation
- Aids toxin elimination
- Reduces inflammation-related pain from the first session

### **IMPORTANT:**

Magnetotherapy serves as **complementary therapy** and does not replace medical treatments. It is non-invasive and free of side effects.

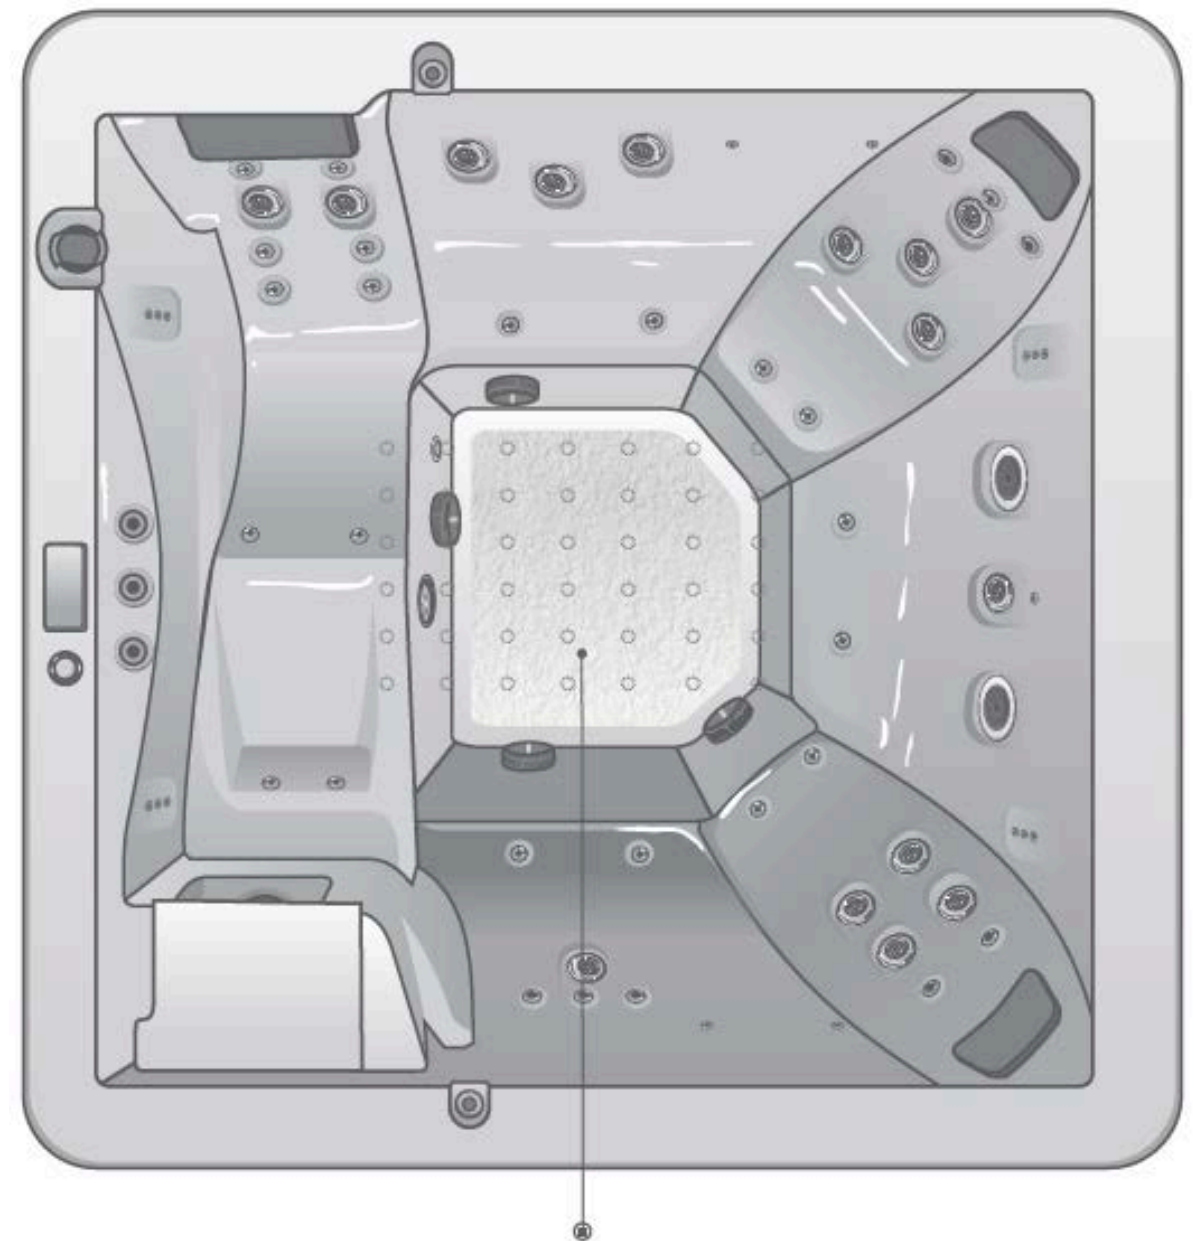

Magnetotherapy



## CHROMOTHERAPY

The LED-based chromotherapy system uses light color frequencies to promote **physical and emotional wellness**.

- Each color frequency generates different sensations of **relaxation, balance, or energy**.


### SYSTEM FEATURES:

- Activated directly from the control panel
- Complements hydrotherapy for a full sensory experience



**5 Available LED  
Light Colors**

LED  
Chromotherapy

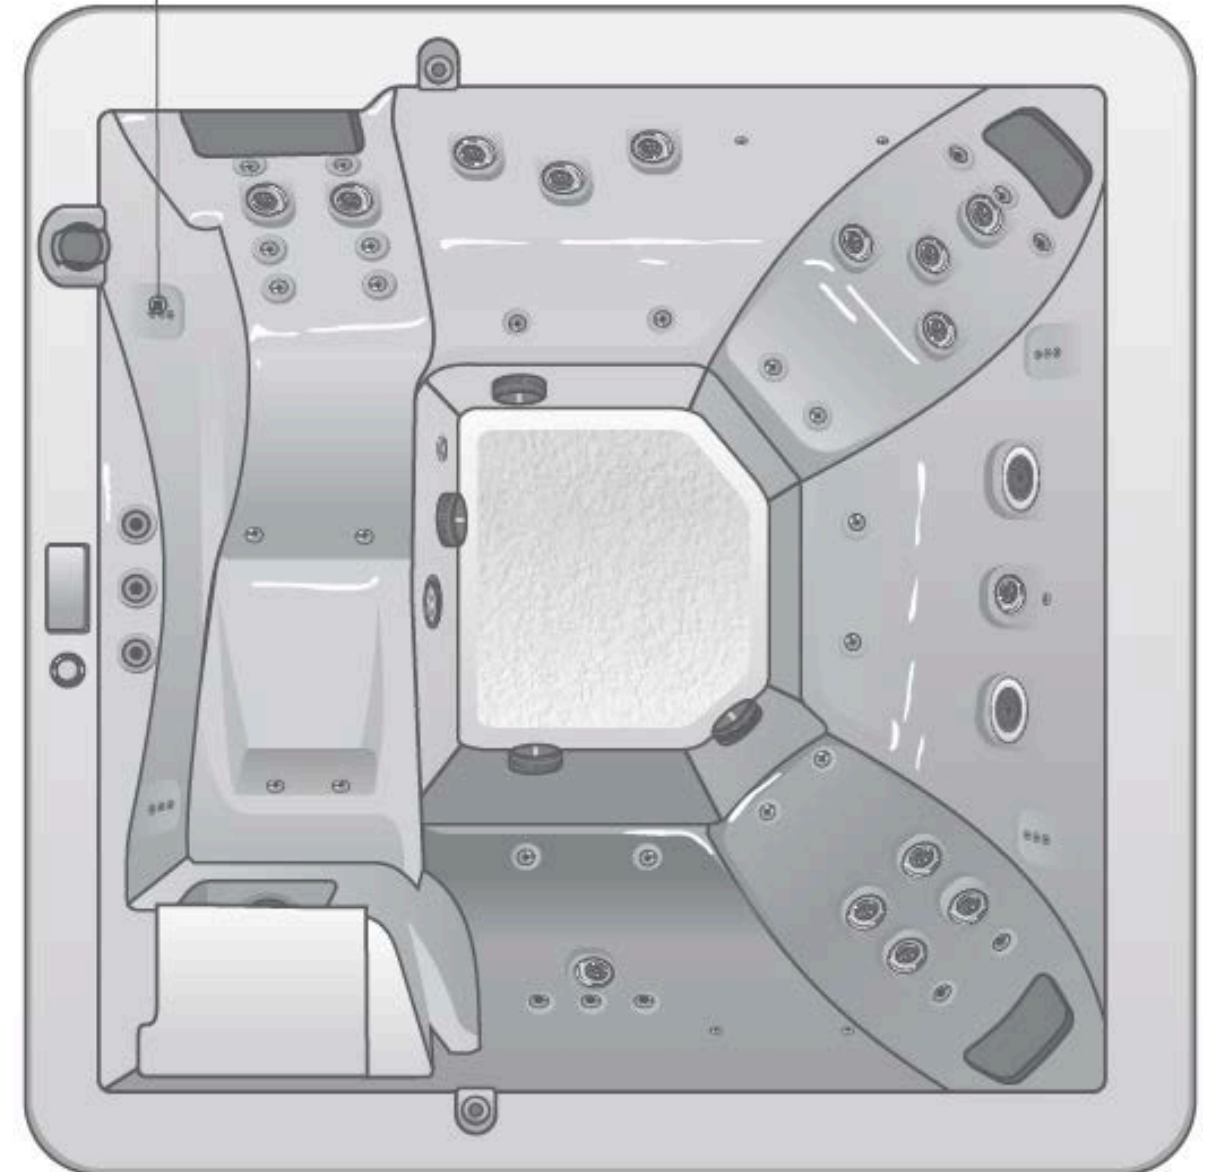

## DIVERTER VALVE

The diverter valves control water flow distribution from the pumps to specific hydrotherapy zones, allowing the user to optimize the massage experience.

- Each valve may direct water to a single area or distribute flow across multiple zones depending on its selected position.




### IMPORTANT OPERATING NOTE:

Always ensure the pumps are running at low speed before adjusting the diverter valves. Turn the valve slowly to avoid pressure surges.

**Position 1:**  
Directs full flow to  
one zone.

**Centered Mode:**  
Splits flow between  
multiple zones.

**Position 2:**  
Directs full flow  
to another zone.

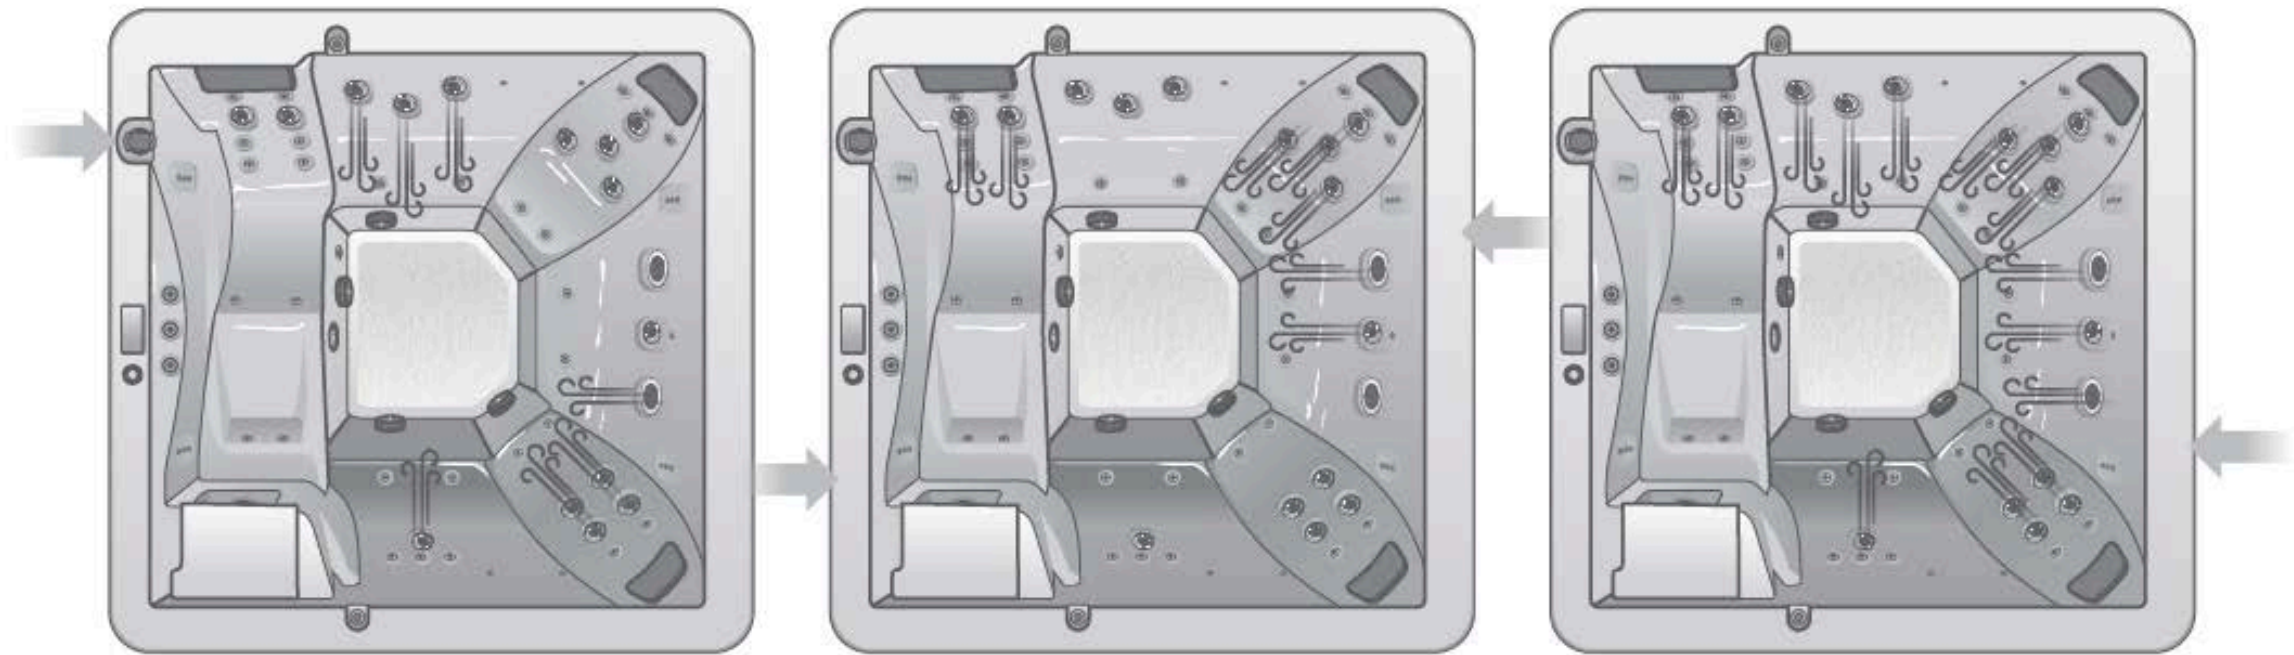

Position 1

Centered Mode

Position 2



## DECORATIVE WATER FEATURE

The decorative water feature is designed to enhance the spa's environment through a **visually refined component** that adds both **elegance and relaxation value**.

Beyond its aesthetic appeal, the system produces **soft and calming water sounds**, contributing to a **tranquil and immersive hydrotherapy experience**.

This combination of **graceful water flow and acoustic balance** transforms each spa session into a **multisensory wellness experience**, supporting **mental relaxation, sensory disconnection, and a deeper state of comfort and serenity**.



# SPA JUMBO

## SUCTION INTAKE


### SUCTION INTAKE

The suction intake draws water from the spa basin into the hydraulic system for recirculation during operation.

#### SAFETY WARNING:



- Do not block the suction intake during spa operation.
- Keep body parts, hair, and objects clear of suction openings at all times.
- Wearing a **bathing cap** is strongly recommended to minimize suction-related hazards.

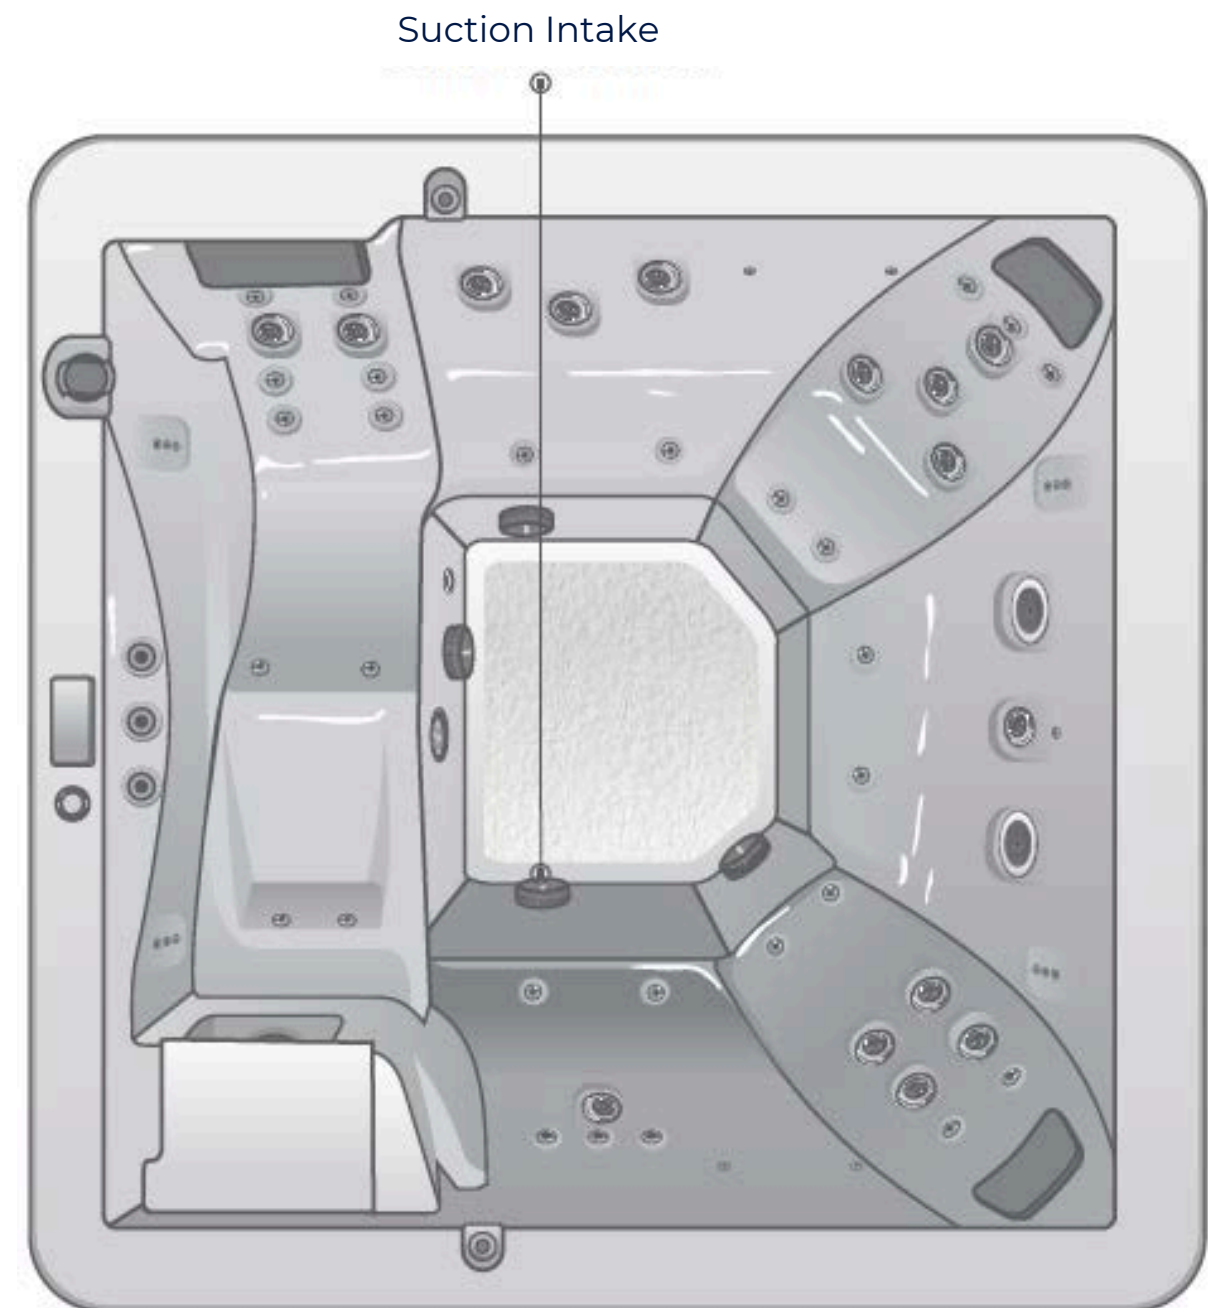



## THERMAL COVER

The thermal cover helps retain water temperature and protect internal components when the spa is not in use.

### FEATURES:

- Manufactured from durable synthetic material for easy handling and cleaning.
- Helps minimize heat loss, evaporation, and contamination from external elements.


### USAGE GUIDELINES:

- Clean regularly using a soft, damp cloth.
- Avoid direct exposure to sun, rain, or excessive weight.
- The cover is designed for insulation only and **should not serve as a support surface.**

### WARNING:



- Do not place heavy objects or sit/stand on the cover.
- For outdoor installations, it is mandatory to protect the spa entirely with a canopy or shelter to extend the lifespan of all components.

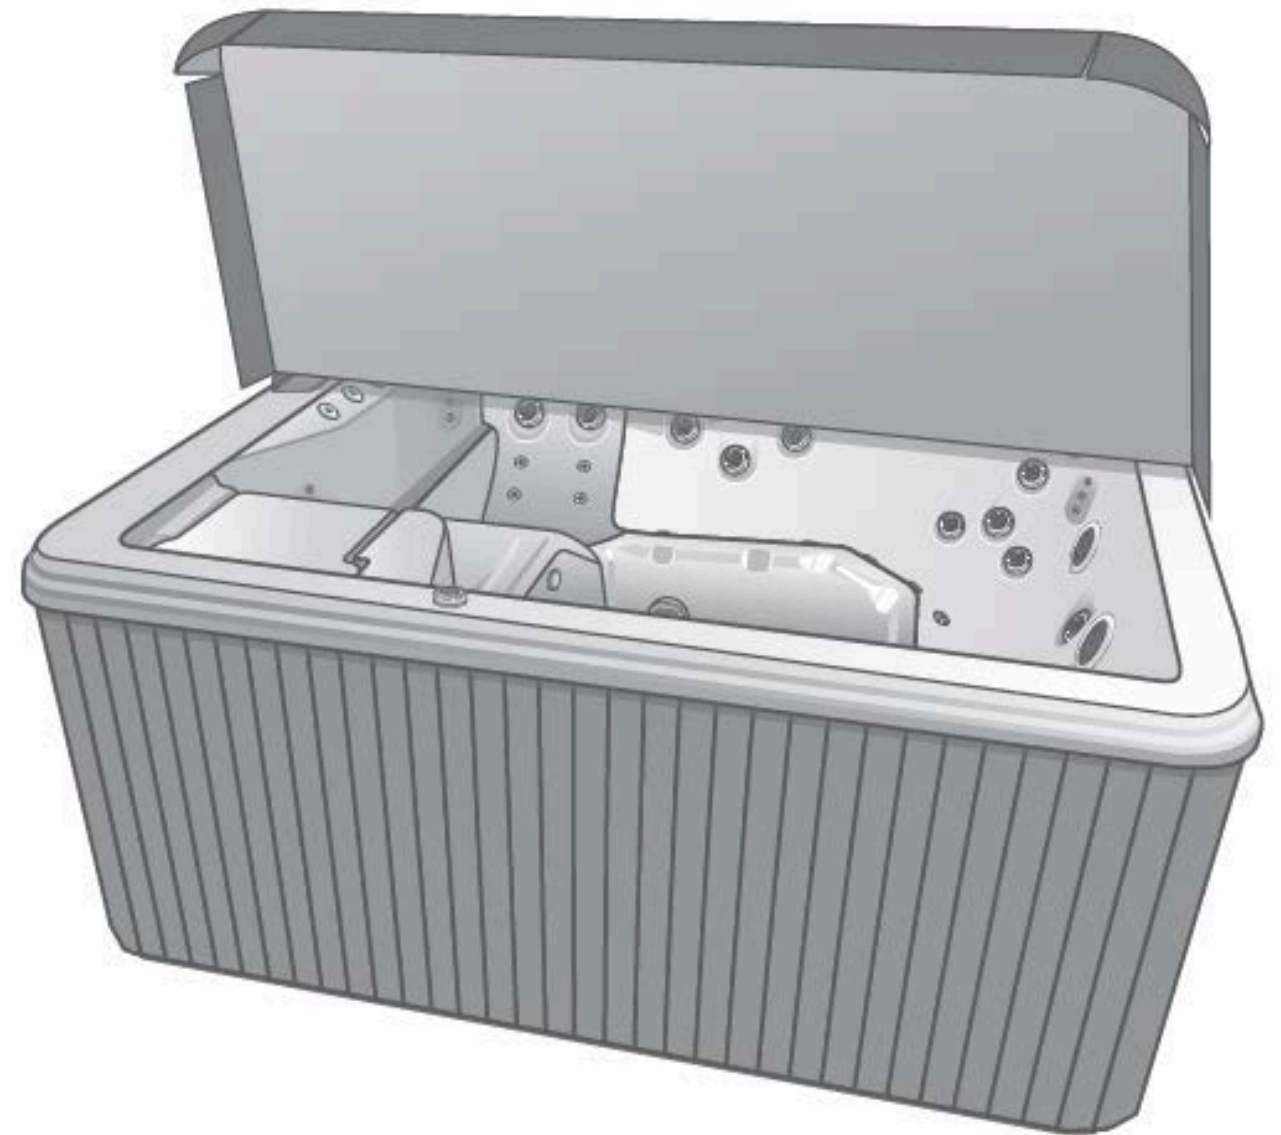

# SPA JUMBO

## FILLING AND WATER LEVEL

### FILLING AND WATER LEVEL

Before operating the spa, ensure it is filled completely to the recommended water level.

#### FILLING INSTRUCTIONS:


- Connect a garden hose to the water supply and insert it into the spa basin.
- Verify that the drain valve is fully closed before filling.
- Fill the spa until **all jets are fully submerged** before starting the system.

#### CRITICAL WARNINGS:



- **Never operate the pumps without water.** Dry operation will cause immediate damage and void the product warranty.
- **Water temperature must not exceed 40°C (104°F)** to prevent acrylic deformation.

The water must fully cover all jets prior to activating the pumps.

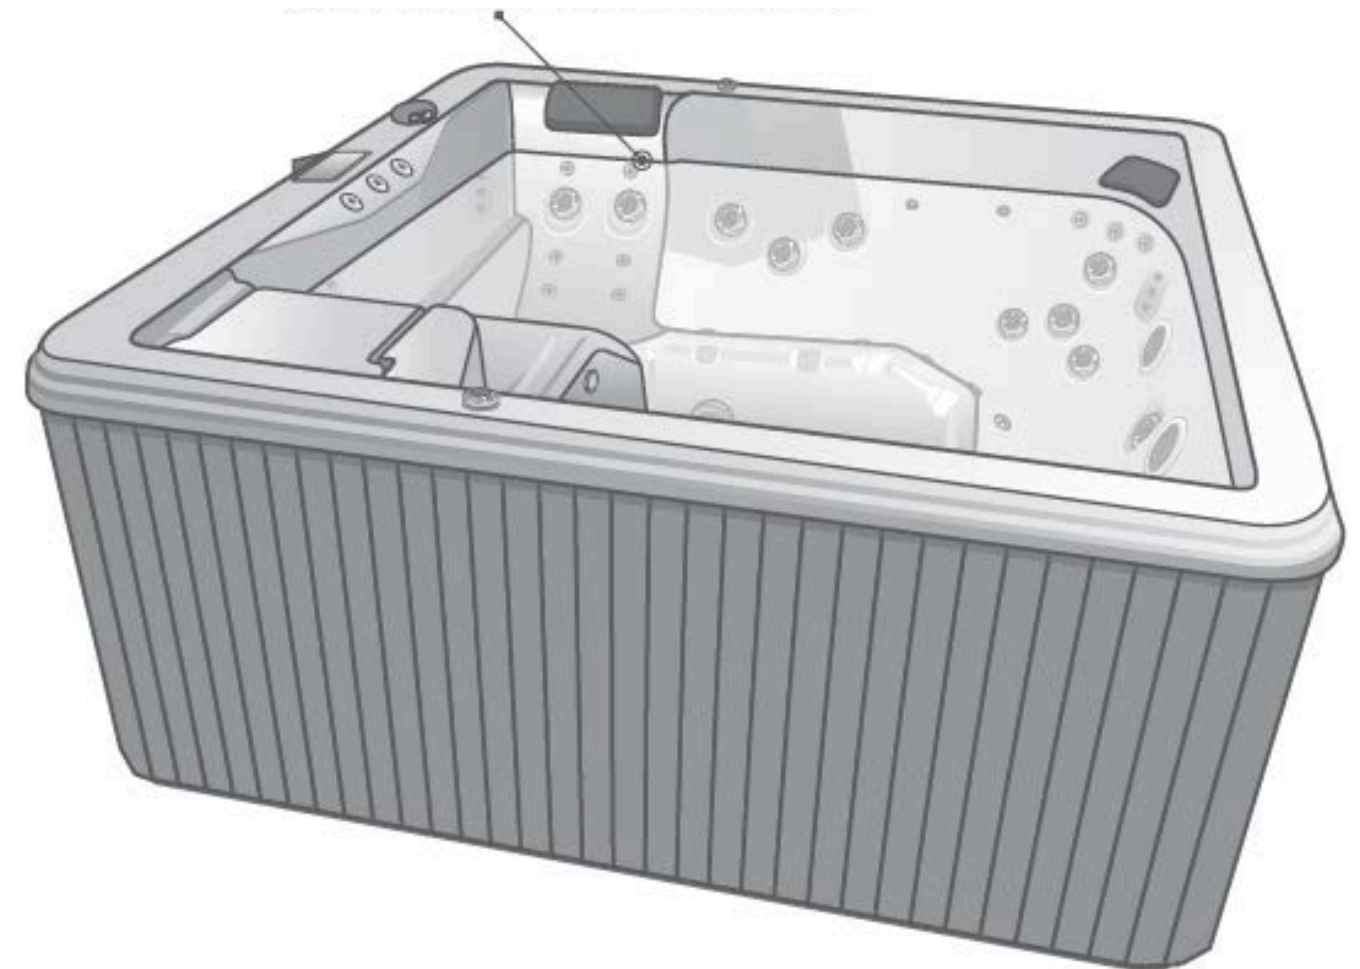





# SPA JUMBO

## ACRYLIC AND CABINET COLORS

### AVAILABLE ACRYLIC COLORS:



White




Beige  
Pearlescent  
(LS8001)



Granite  
Sierra  
(GR7114)


### AVAILABLE CABINET FINISHES:



Teak  
Wood




Synthetic  
Dark Brown



Synthetic  
Light Brown

**Note:** Colors may vary slightly depending on the production batch.  
For current availability, please consult your authorized distributor.

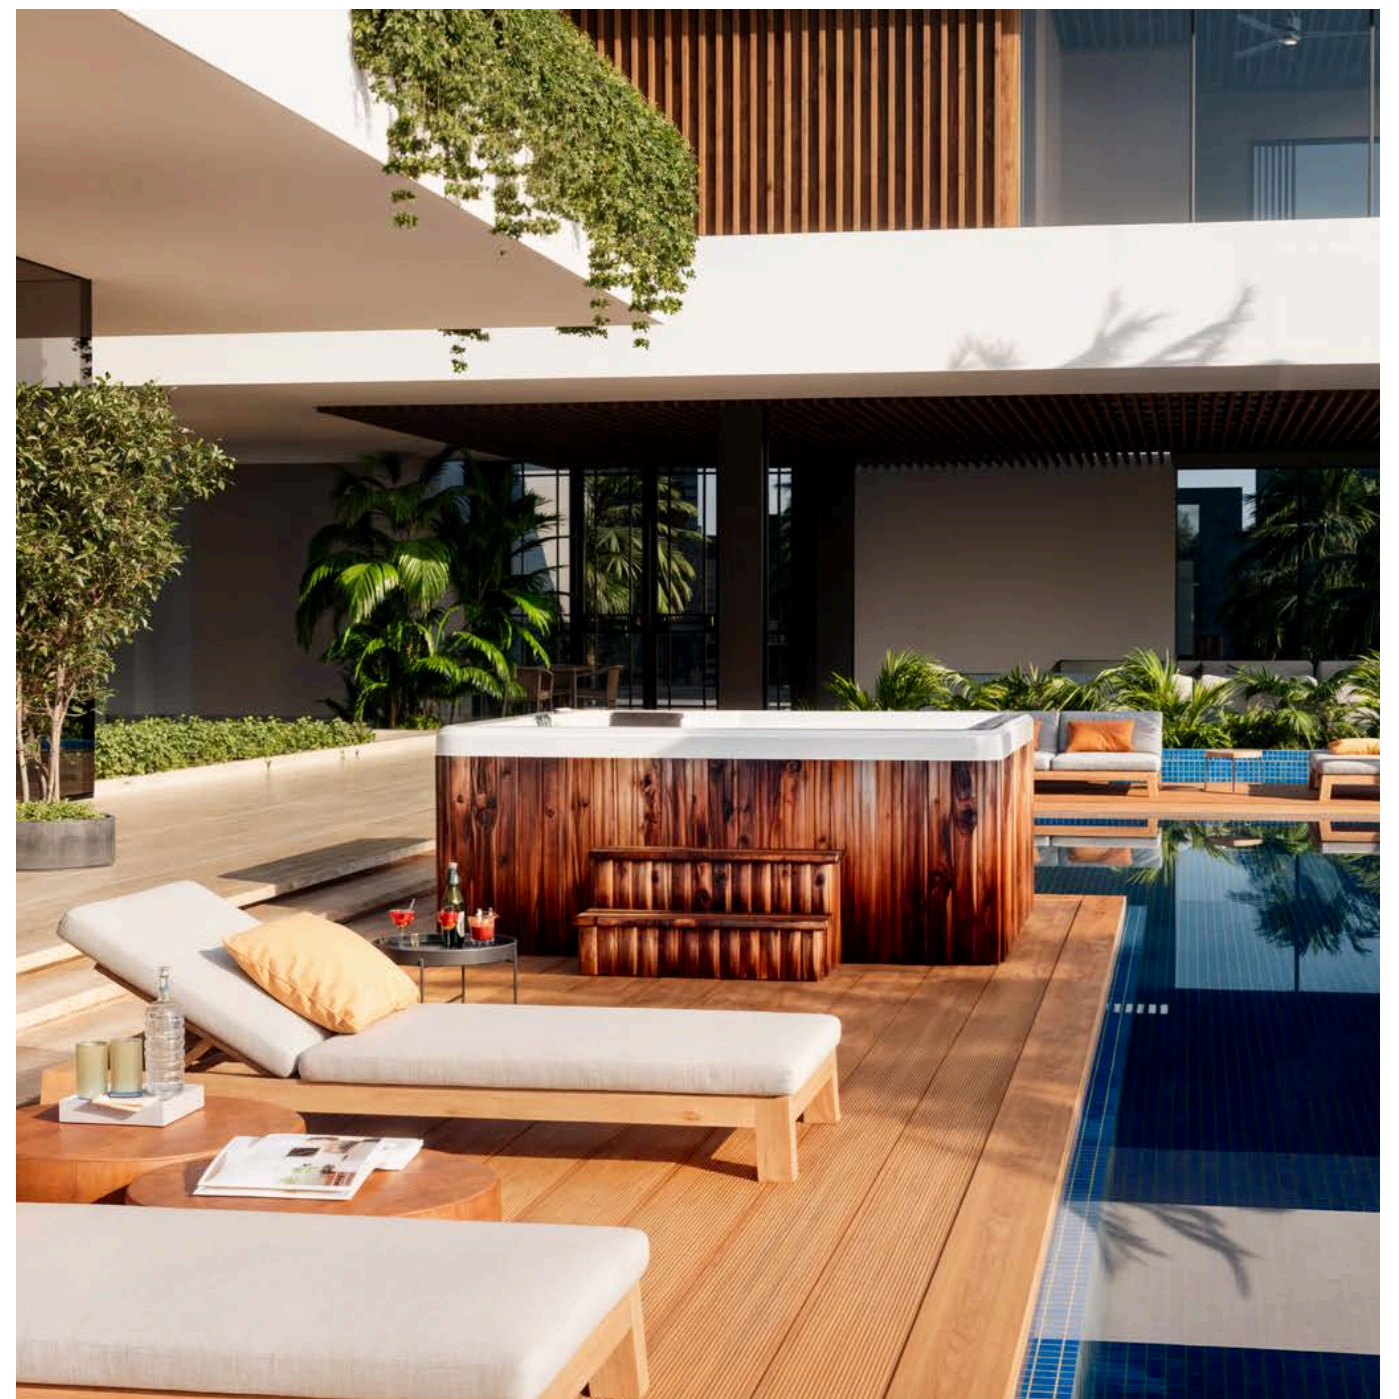

## SERVICE & TECHNICAL SUPPORT

---

For any technical inquiries or service requests, contact the official AQUASPA Technical Support Department.

### **IMPORTANT:**

- AQUASPA assumes no responsibility for damages resulting from unauthorized repairs or use of non-genuine parts.
- The electrical and control systems must not be accessed or modified by the user.
- There are no user-serviceable internal components.
- All electrical work must be performed by a qualified electrician, strictly following this manual.

**Grounding must always be performed using an approved copperweld grounding rod as specified in current regulations.**



FROM ORDINARY TO EXTRAORDINARY

### **CONTACT INFORMATION:**

Aquaspa Siglo 21, S.A. de C.V.  
Aljibe No. 45, Santa Úrsula Xitla,  
Mexico City, 14420  
Phone: (+52) 55 5655 6624  
Email: [tinas@aquaspa.com.mx](mailto:tinas@aquaspa.com.mx)  
Website: [www.aquaspa.com.mx](http://www.aquaspa.com.mx)




# SPA JUMBO

## DIMENSIONS & CAPACITY


### Rigid Concrete Slab

A **reinforced concrete slab** is required to properly support the hot tub when filled and in use.

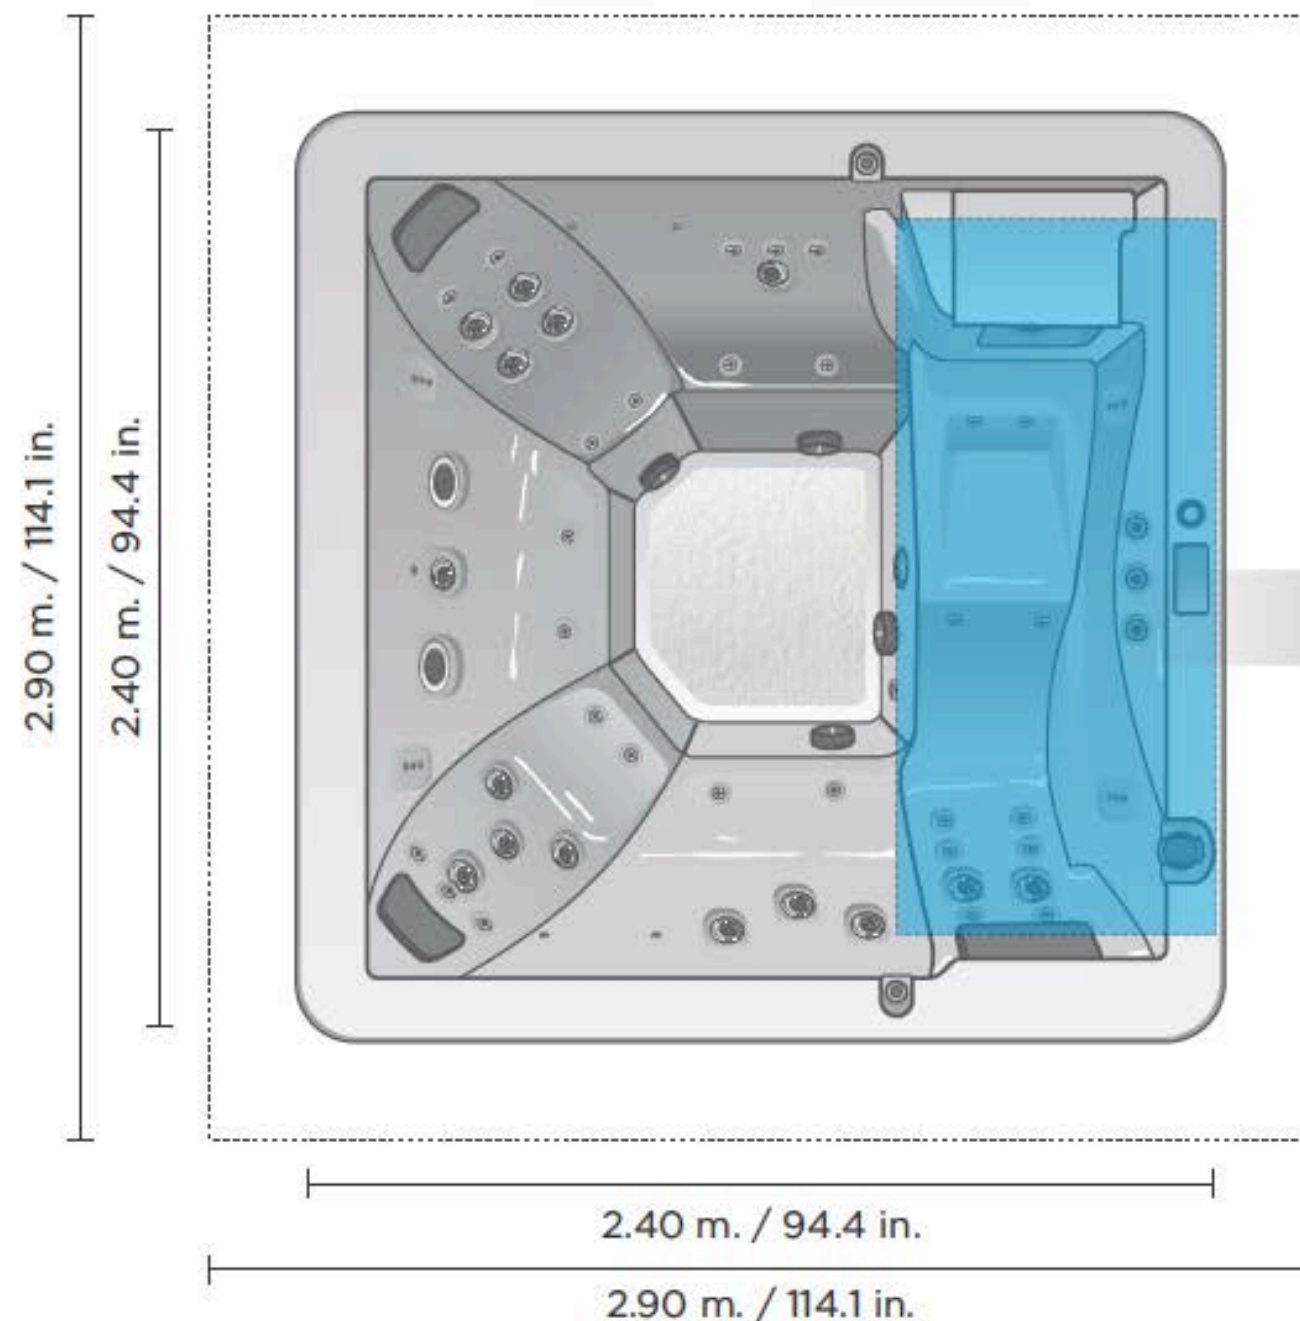

### Right Side – Installation Requirements

The following **three connections** must be available and within reach of the equipment area to ensure proper hot tub operation:

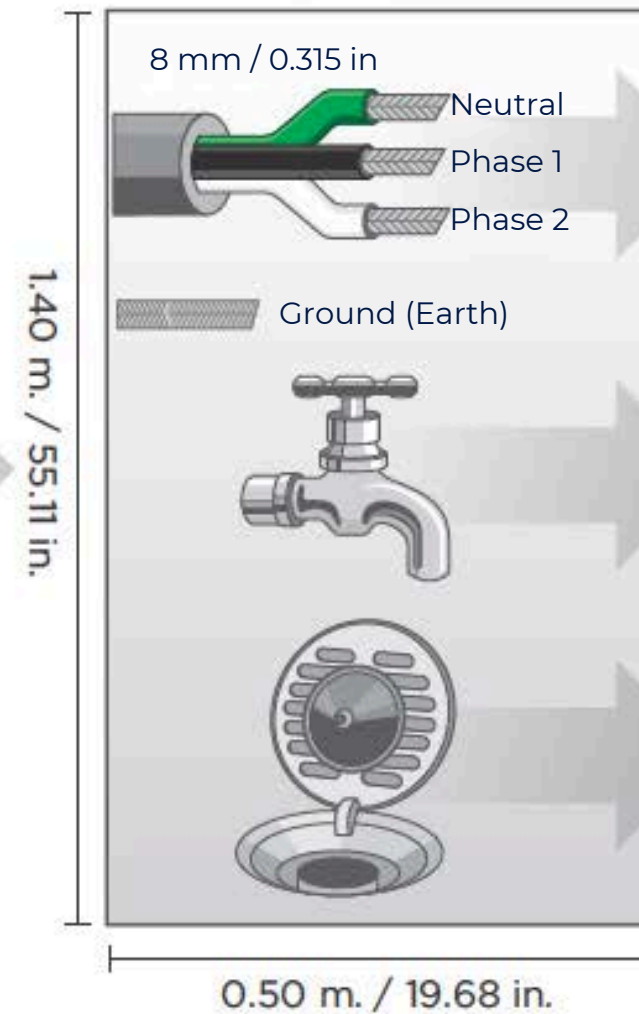

### Electrical Connection

**220 V** connection using **No. 8** wire, with **grounding properly connected** to a copperweld grounding rod.

### Water Inlet

For filling the tub with **hot or cold water**, using a **1-inch pipe**.

### Drain Outlet



For draining the tub, also using a **1-inch pipe**.

# SPA JUMBO

## DIMENSIONS & CAPACITY

### CONCRETE SLAB RECOMMENDATION

Before installation, it is essential to ensure the hot tub will be supported by a **stable and level base** that can handle the total weight when filled with water and in use.

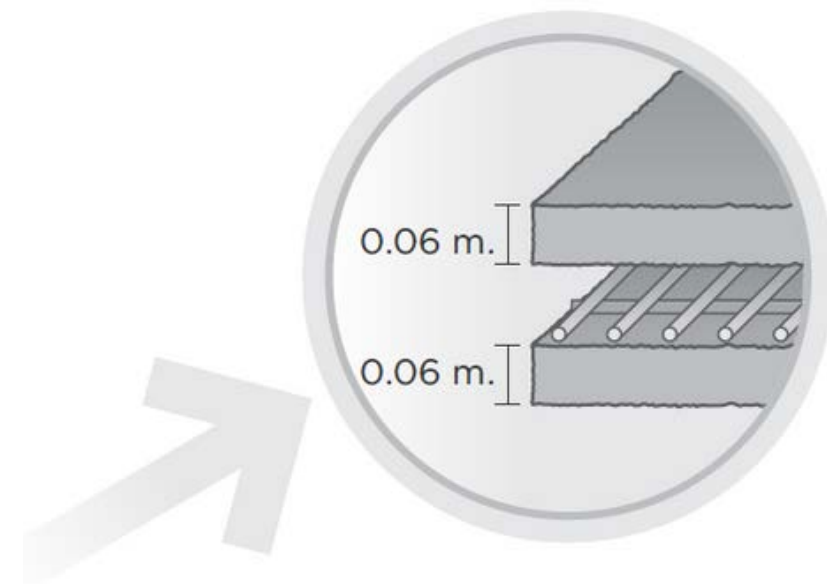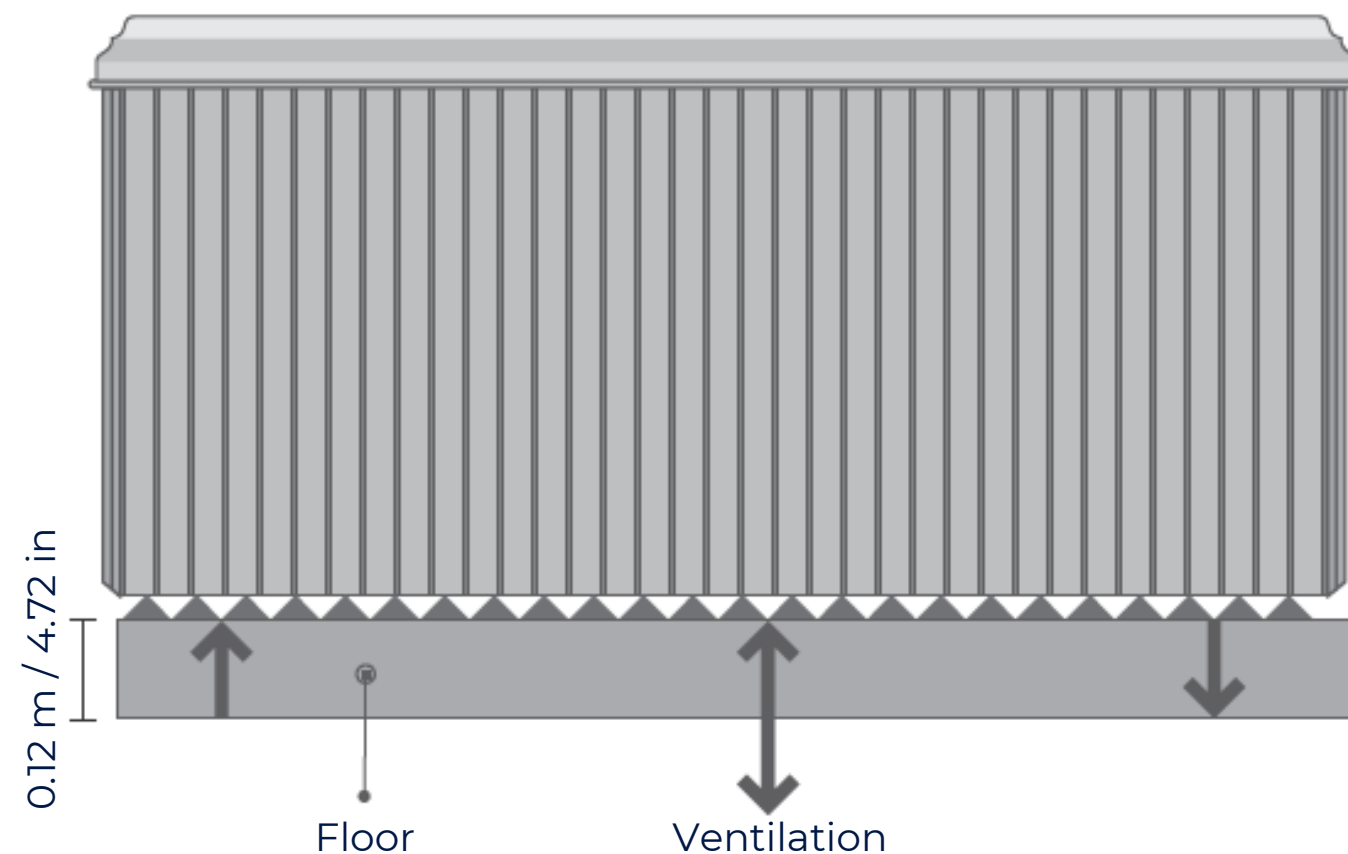

The recommended base consists of a **reinforced concrete slab**, made by pouring **two overlapping layers**, each with a **thickness of 0.06 m (2.36 in.)**, reinforced internally with metal mesh.

Ensure that the ground is **level, compacted, and free of moisture or slopes** to prevent **warping, water infiltration, or equipment displacement over time**.




## DIMENSIONS & CAPACITY

### EXTERNAL DIMENSIONS:

- **Width:** 2.40 m / 94.49 in
- **Length:** 2.40 m / 94.49 in
- **Depth:** 0.88 m / 34.65 in
- **Total Height:** 0.98 m / 38.58 in

### CAPACITY:

- **Water Capacity (approx.):** 2,197 L / 580.3 gal
- **Dry Weight (empty tub):** 650 kg / 1,433 lb
- **Total Filled Weight (including water and users):** Approx. 3,487 kg / 7,687.52 lb

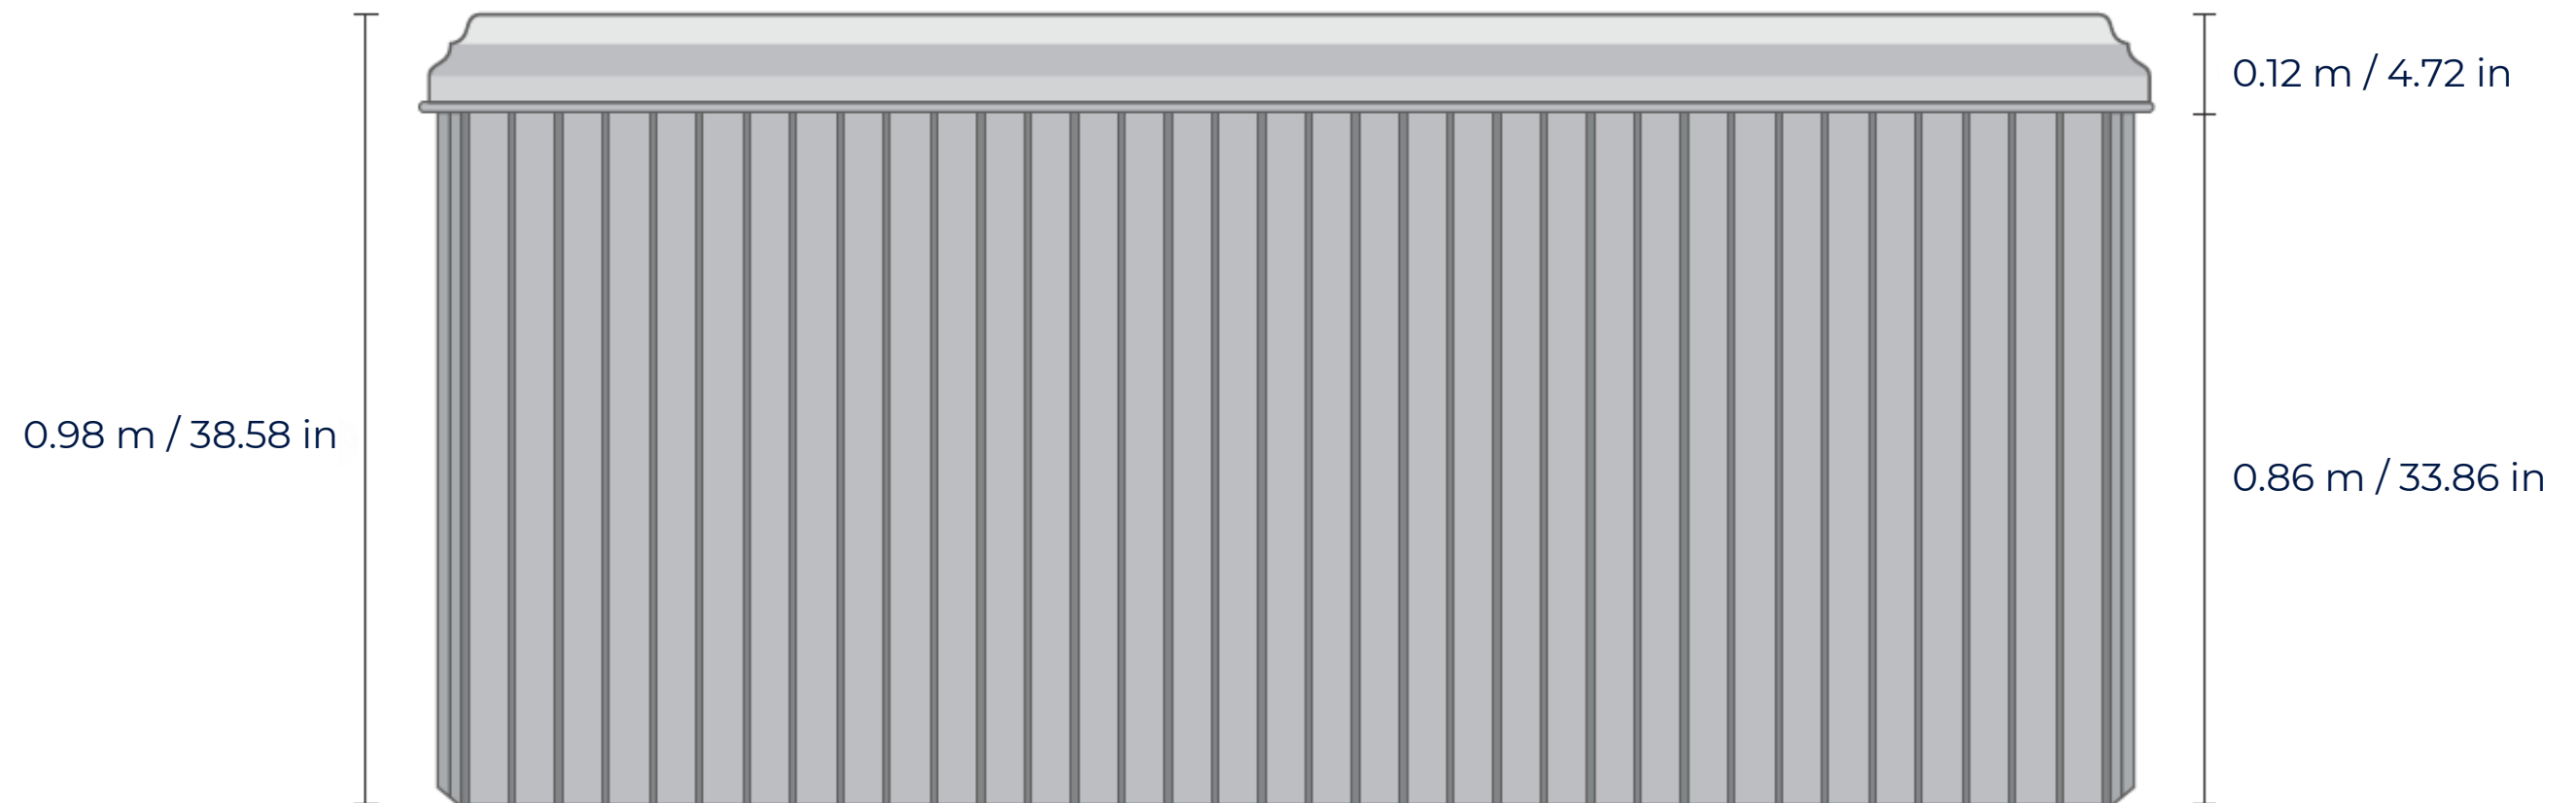

## PRE-INSTALLATION INSPECTION

Before proceeding with the installation, perform a full inspection to ensure the equipment is fully operational and damage-free.

### INSPECTION STEPS:

- Position the unit at its intended location, ensuring that the surface is **level, stable, and moisture-free**.
- Carefully unpack the spa in a clean, protected area.
- Visually verify all hydraulic and pneumatic connections, jets, suction fittings, air valves, and power controls.
- Fill the unit completely, activate the system, and verify:
  - Pump function
  - Jet function
  - Chromotherapy lighting
- Inspect all hose connections for any sign of leakage.

### IMPORTANT:

- If any issue is detected, **do not continue with installation**. Immediately contact your distributor and provide:
  - **Purchase invoice**
  - **Model reference**
  - **Order number**

Aquaspa Siglo 21, S.A. de C.V. is not responsible for damages resulting from improper installation or handling.



# SPA JUMBO

## ELECTRICAL SAFETY INSTALLATION

### ELECTRICAL SAFETY INSTALLATION

The spa's electrical connection must fully comply with NOM-001-SEDE-2012 and all applicable regulations.

#### CONNECTION REQUIREMENTS:


- **Permanent, fixed installation directly wired to the power source.**
- Use **#8 AWG copper wire** with suitable exterior-rated insulation.
- Physical grounding connected to a **copperweld grounding rod**.
- Protection against moisture, splashes, and infiltration.



#### MANDATORY ELECTRICAL PROTECTION:

- Install a **40-amp GFCI circuit breaker (220V)** located in a safe, accessible location.
- Electrical protection must immediately disconnect power in case of malfunction to ensure user safety.

All electrical work must be performed by a licensed electrician. Improper connections will void the equipment warranty.

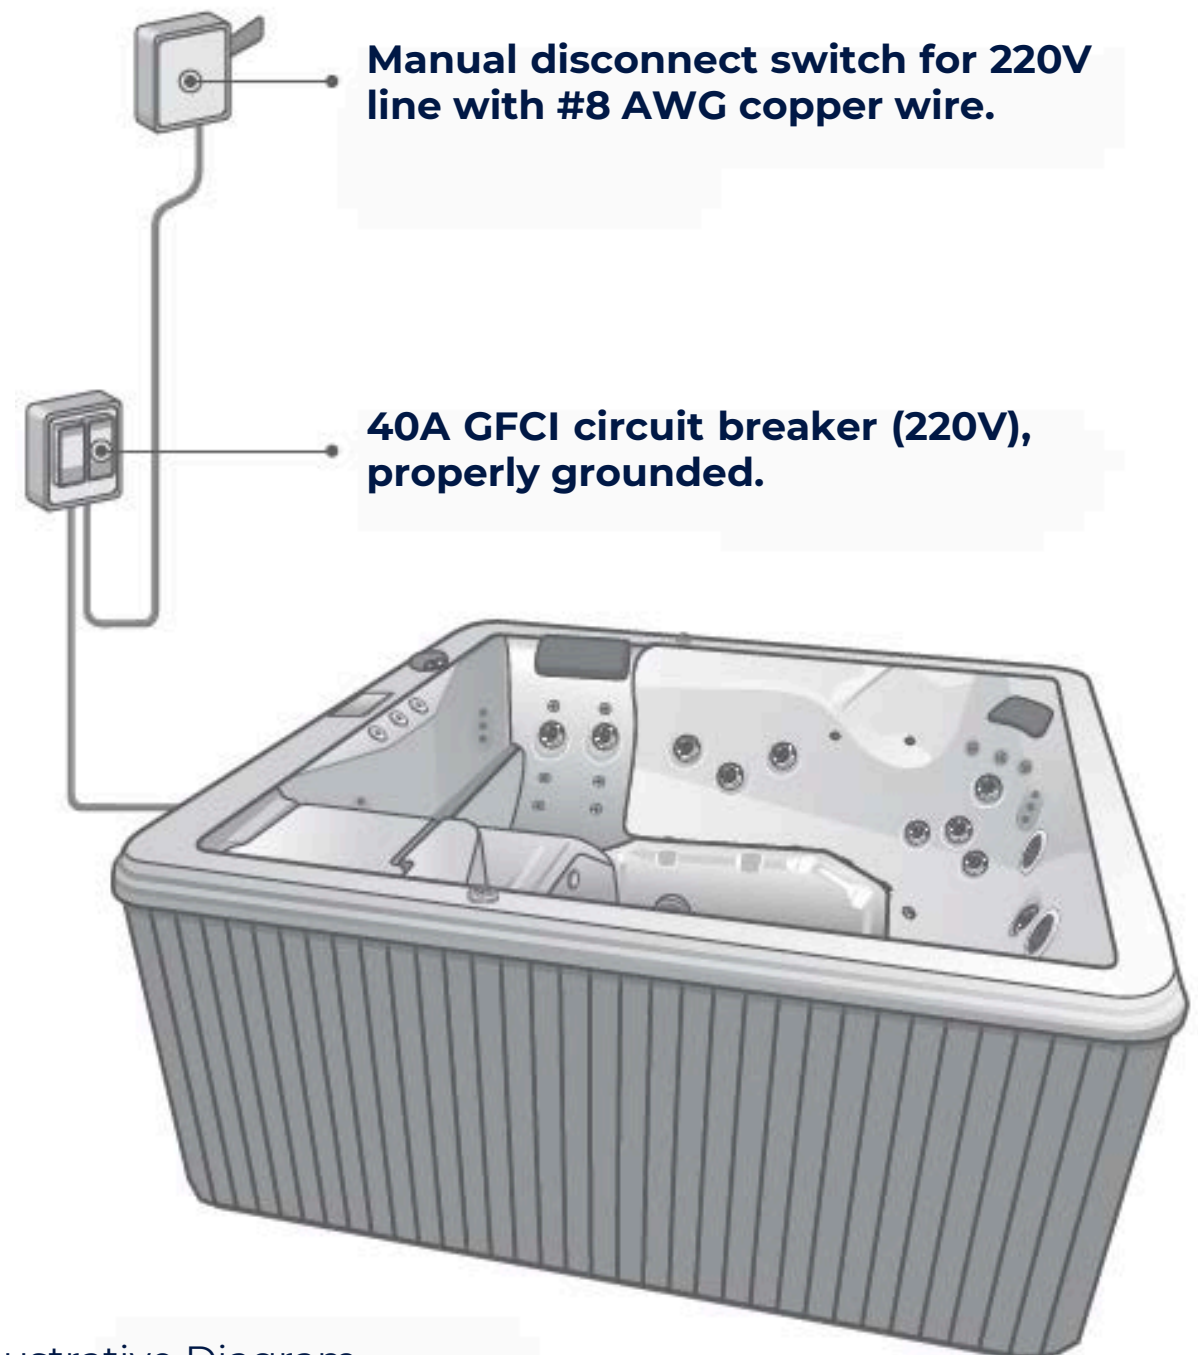

\*Illustrative Diagram


## ELECTRICAL POWER SUPPLY & INSTALLATION

The electrical system must be installed by a **licensed electrician**, following the applicable standards set by the **Dirección General de Normas (DGN), NOM-001-SEDE-2012, and NEC** (National Electrical Code, USA).



### CRITICAL NOTES:

- **Do not connect the spa to power until it is fully filled with water.** Running the system dry may cause irreversible damage and void the warranty.
- A **dedicated power line** should be connected directly to the electric meter:
  - #8 AWG copper conductors
  - Proper grounding using copperweld grounding rod
- The disconnect switch should be installed in a **protected, accessible location** near the spa, preferably inside a technical room or service area.

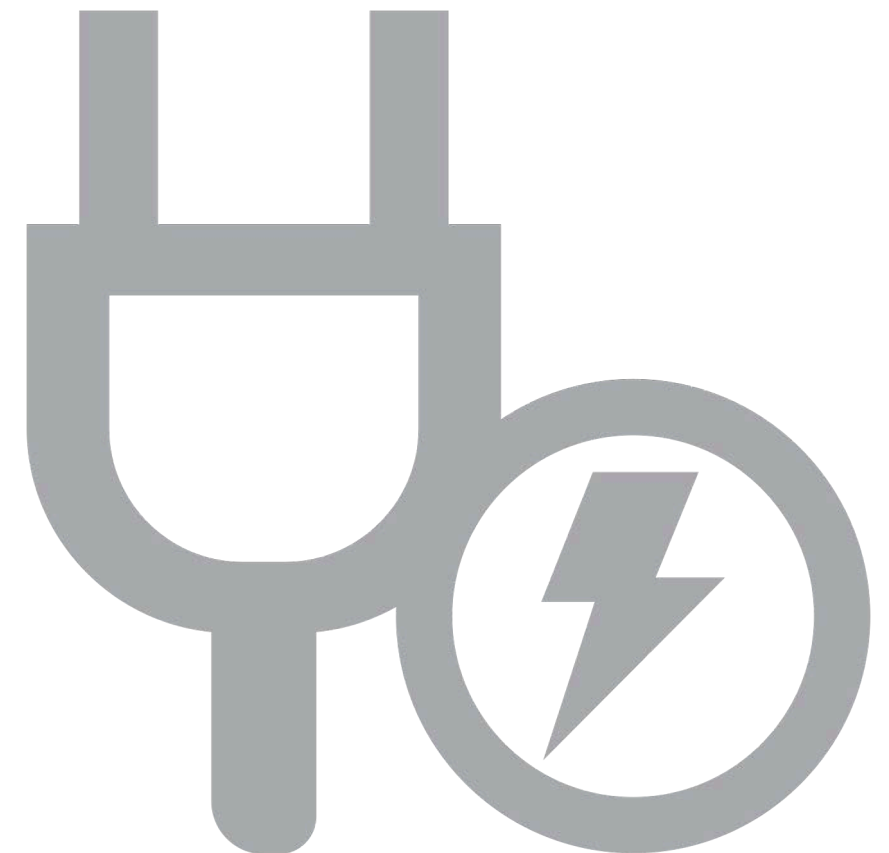



## METAL FRAME STRUCTURE

Some models include an internal metal frame for additional structural reinforcement, especially in built-in or elevated installations.

### TECHNICAL SPECIFICATIONS:


- Constructed with 1 1/4" x 1/8" reinforced steel angle
- Custom-designed to fit the spa perimeter
- Pre-assembled and installed at the factory
- Includes an access compartment for technical service

### BUILT-IN INSTALLATION GUIDELINES:

- Construct a pit-style cavity with lateral access for equipment maintenance.
- Ensure full electrical isolation from hydraulic components.

### METAL FRAME MAINTENANCE:

- Sand with 180-grit wet/dry sandpaper.
- Apply industrial black lacquer paint as needed.

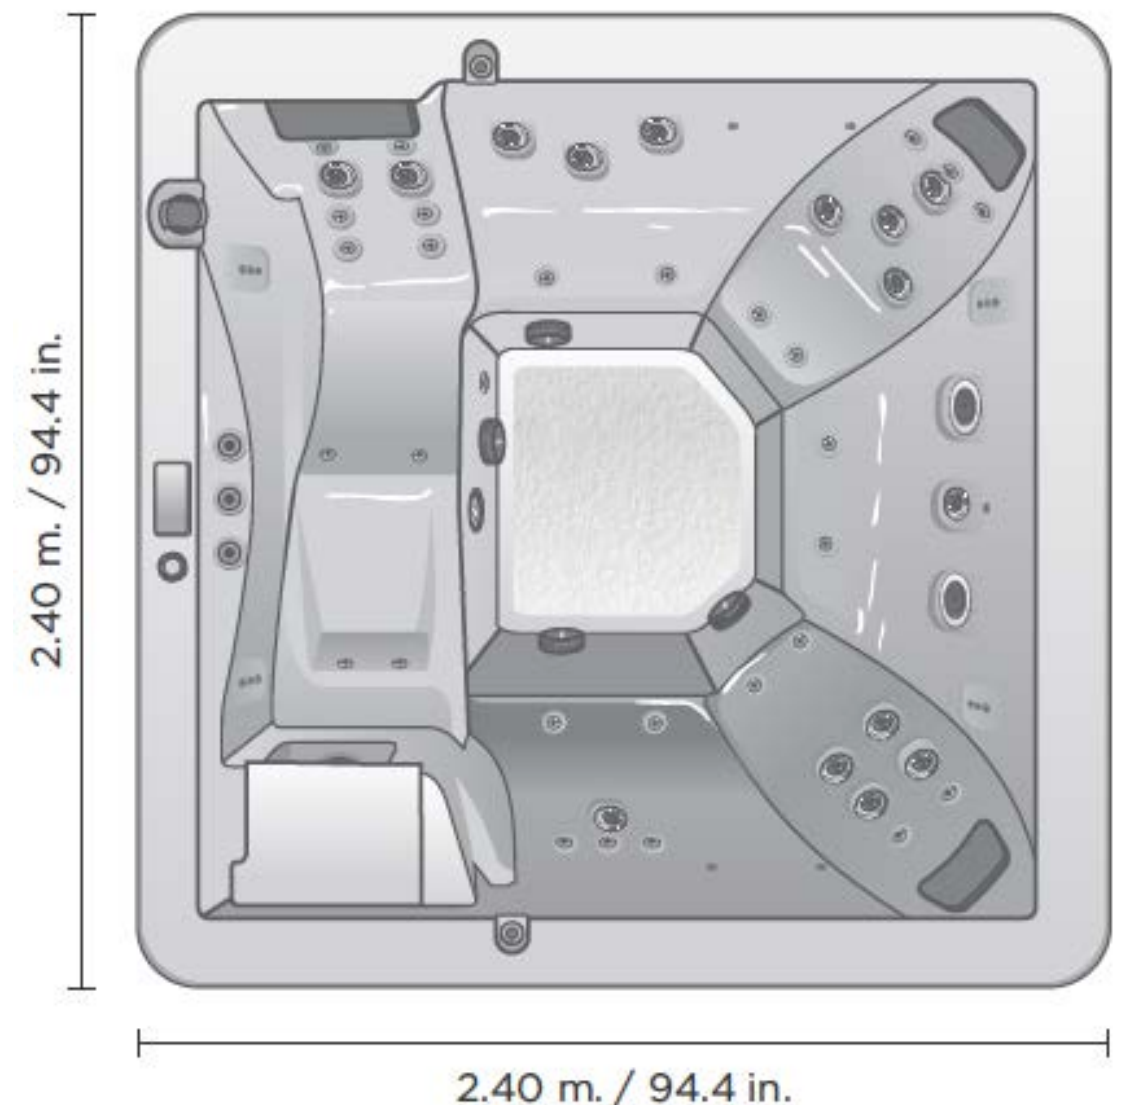

# SPA JUMBO

## FACTORY NOTES

## FACTORY NOTES

AQUASPA reserves the right to apply technical or aesthetic improvements without prior notice to optimize system performance.

### ADDITIONAL CONSIDERATIONS:

- Images in this manual are for illustrative purposes and may differ in color, texture, or finish depending on customization or production lot.
- For safety and equipment protection, always disconnect power when:
  - Performing any maintenance
  - Water level drops below minimum
  - The spa remains unused for extended periods

### NORMAL OPERATING WATER TEMPERATURE RANGE:

- **35°C to 45°C (95°F to 113°F)** depending on ambient conditions and electrical configuration.





# USER MANUAL

# AQUASPA

FROM ORDINARY TO EXTRAORDINARY

**Aquaspa Siglo 21, S.A. de C.V.**  
Aljibe No. 45, Santa Úrsula Xitla,  
Mexico City, 14420  
Phone: (+52) 55 5655 6624  
Email: [tinas@aquaspa.com.mx](mailto:tinas@aquaspa.com.mx)  
Website: [www.aquaspa.com.mx](http://www.aquaspa.com.mx)